



OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 11 TOWNSHIP 16 RANGE 4

DATE: 8-16-06

PARTY CHIEF: Wilcoxon

CREW: \_\_\_\_\_

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 1-16-04

IN. S.P.C. E ZONE NAD '83

NAME: 16041102

N: 511495.7460(m)

E: 66702.7060(m)

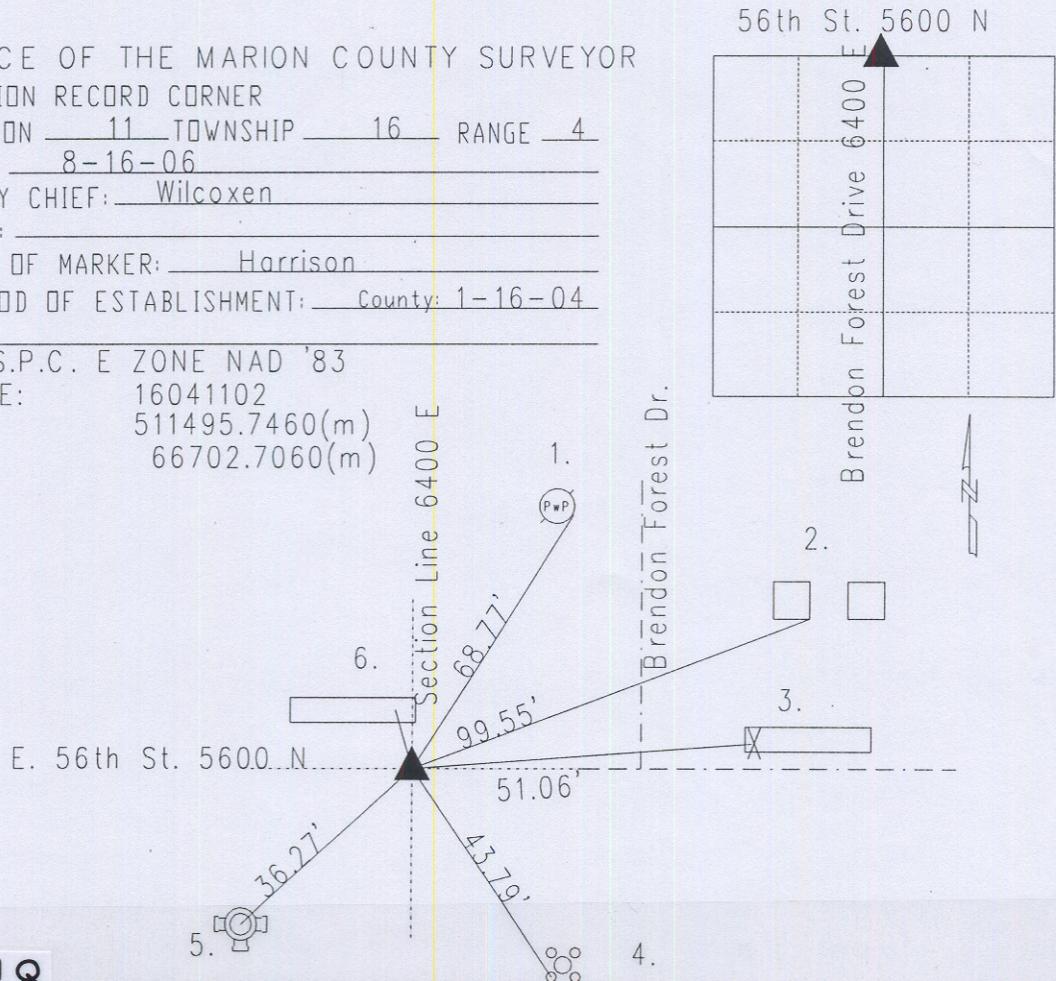

16041102 N Q

**CORNER HISTORY:** Corner originally set as a post in 1820 by John Hendricks with witness: 20" ash S 9 E 22 links; 15" beech N 53 W 11 links per Marion County Atlas pg 11. A survey by John J. Griffith dated 8-28-1919 ran out the NWQ of 11-16-4 per Lawrence Township Legal Survey Book pg. 20. A survey dated 12-5-1895 by John V. Coyner called rock found and set by other surveyors; see S Q 2-16-4 per Lawrence Township Legal Survey Book pg. 42. A survey dated 6-15-1918 by Charles E., Cheney called ran out SWQ 2-16-4 said stone @ S Q corner. Reference dated 5-25-1953 by Monroe called nail w/bw over stone. Reference dated 9-18-1959 called nail w/bw over stone. Reference dated 3-2-71 by McLand called brass plug found. Reference dated 12-15-75 by Wilcoxon called set PK nail. Reference dated 3-10-80 by Wilcoxon called PK nail found. Reference dated 7-7-88 by Gries called PK nail found. Reference dated 8-21-96 by Kiste called brass plug in steel box found. Reference dated 1-16-04 by Wilcoxon called brass plug in steel box found. Reference dated 8-14-06 by Wilcoxon called found brass plug in steel box down 3". Set Harrison where the brass plug was located, no other points were found.

REF.	DISTANCE	DESCRIPTION
1.	68.77'	Mag nail w/bw F PwP#2-347 3"up
2.	99.55'	SF corner of brick column
3.	51.06'	Cut 'x' in median
4.	43.79'	Cut 'x' SW bolt of light pole base
5.	36.27'	Top nut of fire hydrant
6.	5.94'	Cut 'x' in median